## C&I On / Off-Grid ESS

#### 1. Maximum product flexibility:

JESS scommercial product platform carries the full range of storage product from 20 kWh up to 1MWh to cater to each individual need.

#### 2. Industry leading cycle performance:

We lead the industry with cell cycle of more than 6000 times. More than enough for majority of renewable energy scenario.

#### 3. Easy installation:

System is designed with quick installation each step of the way.

LiFePO4 battery compatible with reliability and energy density



Small footprint, flexible installation, easy maintenance



Advanced thermal management system

High charge/discharge efficiency



Modular design, quick delivery, expansion to MW-level system

#### **Application**

**Circuit Diagram** 



## **Pack Configuration**

System could be designed according to different Pack/Rack combination.




Rated Energy	7.68kWh	10.24kWh	11.52kWh	
Battery type	LFP	LFP	LFP	
Cell capacity	300Ah	200Ah	300Ah	
Rated Voltage	25.6V	51.2V	38.4V	
Max. Voltage	28.8V	57.6V	43.2V	
Min. Voltage	22.4V	44.8V	33.6V	
Rated Charge/Discharge C rate	1C/1C	0.5C/0.5C	1C/1C	
Dimensions	517*676*168mm	450*850*168mm	715*630*168mm	
Weight	76kg	100kg	110kg	

## **Rack Configuration**



Rated Energy	222.7kWh	143.3kWh	
Rated Voltage	742.4 V	716.8 V	
Operating voltage range	649.6-835.2 V	627.2- 806.4V	
Rated capacity	300Ah	200Ah	
Charge/discharge rate	1C	0.5 C	
W*D*H Dimensions	2271 * 2465 * 700mm	1580 * 2461 * 950mm	
Weight	2500kg	1730kg	

## PCS + Battery AC Couple

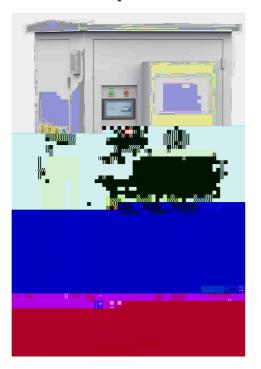

Item	Parameter	
Rated power	30kW	
AC voltage	400V	
Frequency	50Hz	
Pack	2P16S(200Ah)	
Packnumber	9	
Dimensions(W*D*H)	2300mm*1000mm*1200mm	
Protection level	IP55	
DC voltage range	358.4V-460.8V	
Capacity	81.92kWh	
Integrated Controls	RS485/CAN/Ethernet	
Compliance	UL9540,UL1973,UL1741	

# Hybrid Inverter DC Couple

